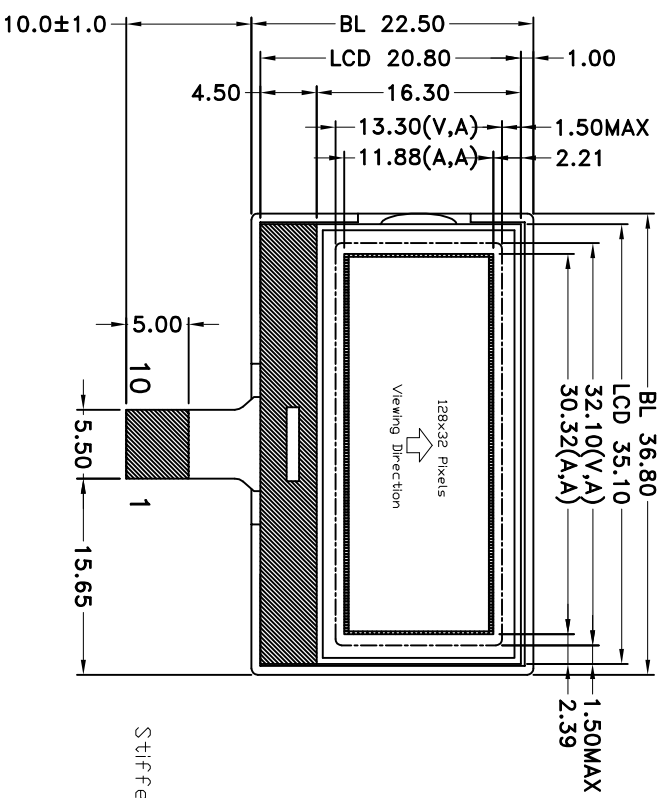
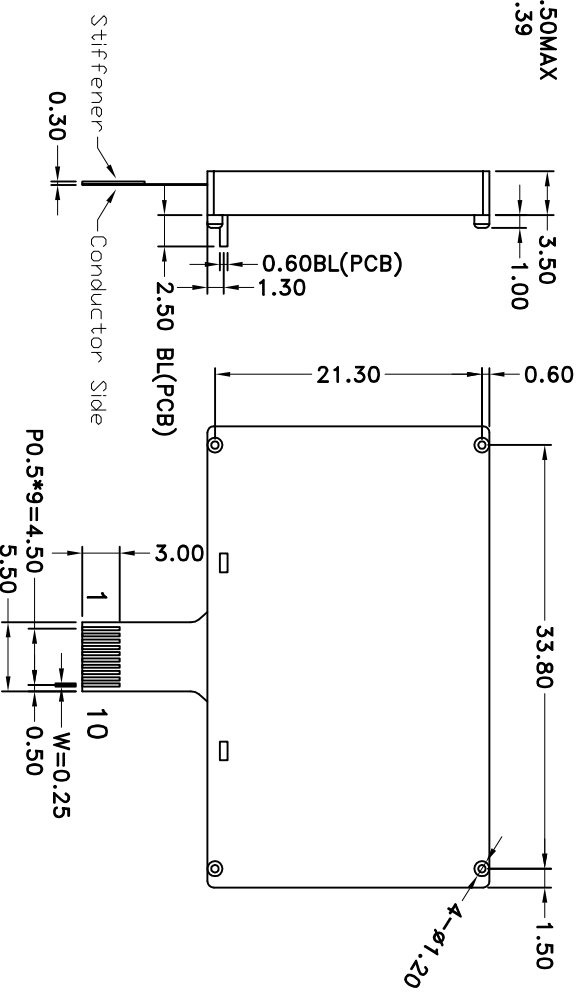


PIN	SYMBOL
1	/CS1
2	/RES
3	A0
4	SCL
5	SI
6	VDD
7	VSS
8	V0
9	XV0
10	VG

*1. LCD Display Type	FSTN,Transflective,Positive		
*2. Viewing Direction	6H	*6. Storage Temp	-30°C~80°C
*3. LCD Driver Mode	1/33Duty,1/6Bias	*7. Driver IC	ST7567
*4. Operating Voltage	3.3V	*8. Backlight	WHITE Vf=30V If=15mA
*5. Operating Temp	-20°C~70°C	*9. RHDS	

HOT DISPLAY					
Dwg Title:		HTG12832-12-31W-10C05-V01			
EDC No:		10200315		Veri	
Scale		Unit	Tol.		Veri
1:1		mm	±0.3		A/0
					
Drawn		Checked		Date:	
LIWEI				2014-09-26	