


- Note:
- *1. LCD Display Type : STN-Blue, Negative,
 - *2. Viewing Direction : 6H
 - *3. Duty : 1/64; Bias : 1/9
 - *4. Operating Voltage : 3.3V, VLCD = 9.6V
 - *5. Operating Current : TBD
 - *6. Operating Temperature : -20°C~70°C
 - *7. Storage Temperature : -30°C~80°C
 - *8. Control/Drive IC : ST7565R
 - *9. Connector : COG/FPC

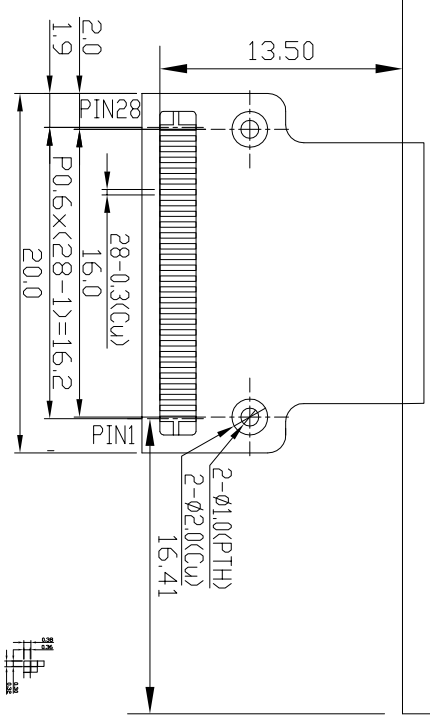

PIN ASSIGNMENT

PIN	SYMBOL	PIN	SYMBOL
1	CS1	15	VOUT
2	RES	16	CAP3P
3	A0	17	CAP1N
4	WR	18	CAP1P
5	RD	19	CAP2P
6	DD	20	CAP2N
7	D1	21	V4
8	D2	22	V3
9	D3	23	V2
10	D4	24	V1
11	D5	25	V0
12	D6(SCL)	26	C86
13	D7(SI)	27	P/S
14	VSS	28	VDD

HOT DISPLAY

Dwg Title
HTG12864R-25W-28K06 Outline

Dwg No. 1202151028 Date 2012-02-15

Scale Unit Tol. ±0.2

Drawn Analyt Checked Approved